


550°F / 287°C: High Temperature Heat & Chemical Resistance DeltaGlass™ Fiberglass Fabric with PTFE Resin Impregnation and Self Adhesive Backing

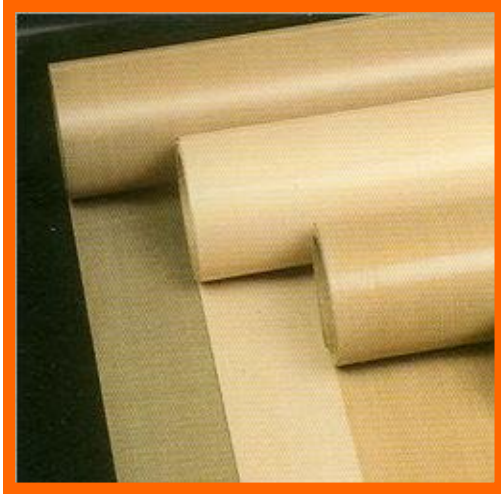

- PTFE Resin Impregnation.

This fabric offers higher temperature range with excellent resistance to almost all solvents, caustics and acids. Very smooth and non-porous ptfе finish. High Temperature self adhesive backing with peel-off protection layer to reveal the adhesive. Will not cold flow under heavy loads.

The base fabric is rated to 1000°F / 537°C. PTFE melting point is 620°F / 327°C.

Used in packaging as a release surface on heat sealers, blister and form-fill sealing equipment. Also used as a lining on guide rails, chutes and slides.

550°F / 287°C continuous rating, high insulation value & excellent personnel protection

High Temperature, Heat & Chemical Resistance DeltaGlass™ Fabric with PTFE Impregnation and Self Adhesive				
Part Number	Total Thickness incl adhesive, in.	Fabric with Coating Thickness, in.	Adhesion to steel oz/in	Price per yard
F-FG-PT-RI-PSA-004739	.0047	.0030	45	\$ call
F-FG-PT-RI-PSA-006739	.0067	.0050	55	\$ call
F-FG-PT-RI-PSA-007739	.0077	.0060	55	\$ call
F-FG-PT-RI-PSA-017739	.0177	.0100	60	\$ call
F-FG-PT-RI-PSA-015739	.0157	.0140	65	\$ call

- Adhesive Thickness is .0017 on all products
- Elongation at break is less than 5%
- Roll length is 36 yards
- Available in Standard and Premium grades. Premium grade has an almost perfectly smooth surface while standard grade surface has some profiling of the underlying base fabric.

This Product is Available By-The-Yard: Discounts for full roll purchases

The PTFE resin is applied to the fabric in a hot process and under pressure, causing a total impregnation of the base fabric. The surface of the resin is smooth and it takes considerable and aggressive force to scratch the ptfе surface to remove it from the fabric with fingernail scraping.